



SECTION A-A

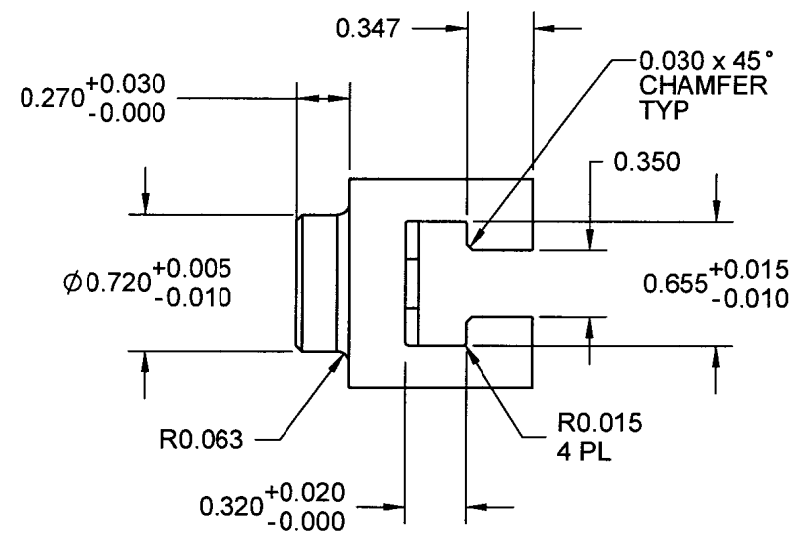

DETAIL VIEW B

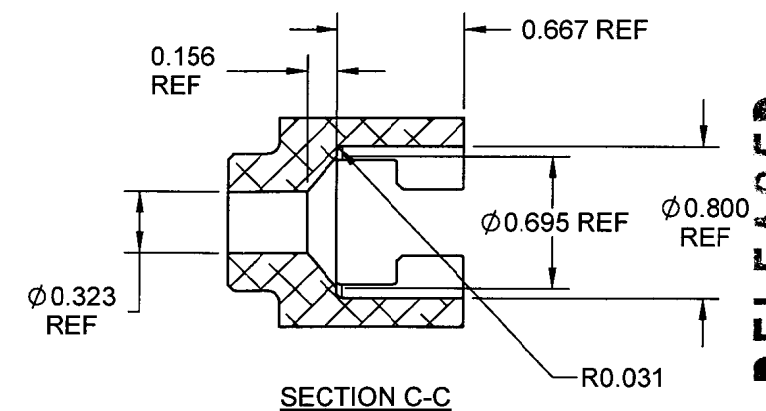

SECTION C-C

**D3808-1 SEAT RAIL**

- NOTES:**
- 1) MATERIAL: 6061-T6 (OR T651/T6510/T6511/T62) ALUMINUM BAR PER AMS-QQ-A-200/8 (OR AMS 4160) OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116) (REF. DART SPEC. M6061T6B)
  - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
  - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
  - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
  - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
  - 6) IDENTIFICATION: ENGRAVE ARROW & FWD AS SHOWN USING 0.30 HIGH LETTERS TO MAX DEPTH OF 0.005
  - 7) WEIGHT: 0.768 lbs

DESIGN	RF	<b>DART AEROSPACE LTD</b>	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. A
MFG. APPR.		<b>D3808</b>	SHEET 2 OF 2
APPROVED		TITLE	SCALE
DE APPR.		<b>SEAT RAIL ASSEMBLY</b>	NTS
DATE	<b>08.08.08</b>	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

**RELEASED**  
2008-08-08